


## optimus yellow Sound Level Meters for Simple Noise Measurements

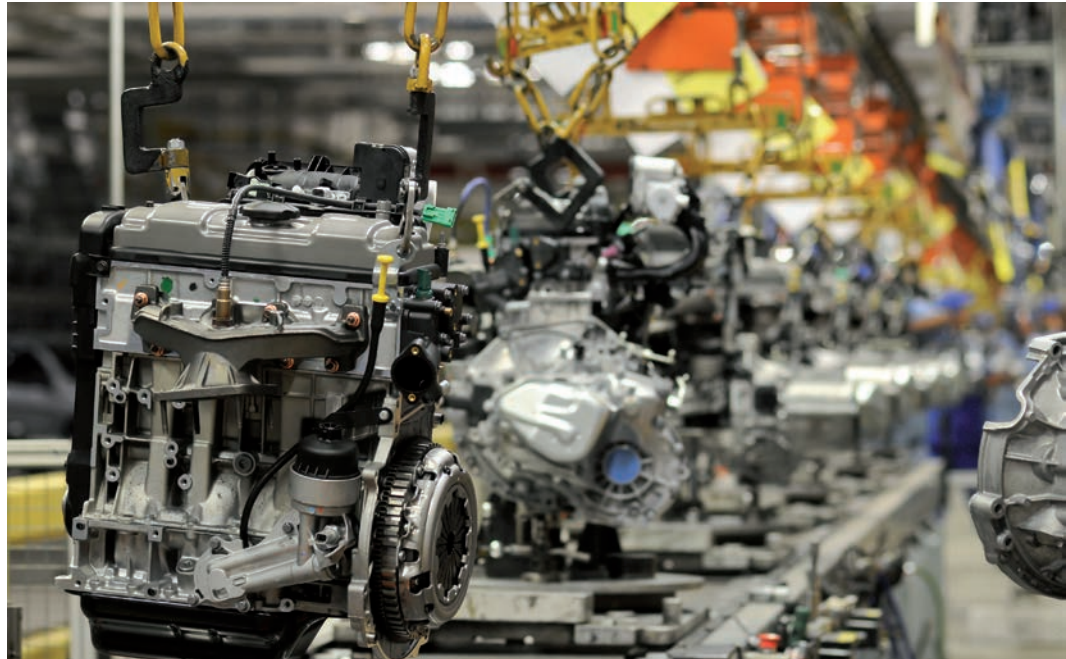

The **optimus yellow** instruments are a range of state-of-the-art sound level meters that have been designed to meet the very latest standards for noise measurement instruments and provide the highest level of performance possible whilst being simple to setup, use and operate.

### Applications

- Simple Noise Level Testing
- Noise Ordinance Enforcement
- Community Noise Assessment
- Fire & Emergency Alarm Testing
- Machinery Servicing & Maintenance

There are many noise measurement applications where integrated noise levels, such as  $L_{eq}$  or  $L_{AVG}$ , are not required and where basic noise data such as Sound Level (SPL) or Maximum Sound Level ( $L_{max}$ ) are all that is needed. These applications include simple noise level testing, noise ordinance enforcement and testing of fire and emergency alarms.

The **optimus yellow** instruments are ideal for these applications and can be upgraded to add further functions, future proofing your investment.

### Simple operation to make measurements simple

The instruments will measure every parameter simultaneously so there is no possibility of you setting the wrong function, but only the most important data is displayed on the screen. Where data logging is fitted, store this information for download to the NoiseTools software.

### Key Features

- Simple operation
- Simultaneous measurement of all parameters
- High resolution colour OLED display
- Latest digital technology
- Ergonomically designed case
- 120dB Measurement range
- Optional Data Logging with VoiceTag audio recording

### Data Logging of measured data

The CR:152B and CR:151B instruments provide data logging of over 10,000 records as well as allowing VoiceTag audio information to be stored before each measurement.

These recordings can be played back in the NoiseTools software to provide notes and documentation for each measurement.

### A clear upgrade path to protect your investment

A sound level meter should be an investment and the **optimus** range has been designed with the future in mind.

The units can be upgraded and enhanced as and when new regulations are introduced or when new functions are available.

# Specifications



## Applicable Standards

IEC 61672-1:2002 Class 1 or Class 2 Group X  
IEC 60651:2001 Type 1 I or Type 2 I  
ANSI S1.4 -1983 (R2006)

## Microphone

Class 1 Instruments MK:224 pre-polarized  
Class 2 Instruments MK:216 pre-polarized

## Microphone Preamplifier

MV:200 Removable Preamplifier

## Total Measurement Range:

20dB to 140dB RMS Single Range  
Noise Floor: <18dB(A) Class 1, <21dB(A) Class 2

## Frequency Weightings

RMS: A, C, & Z Measured Simultaneously

## Time Weightings

Fast, Slow & Impulse Measured Simultaneously

## Display

High resolution OLED display with ambient light sensor & illuminated keypad

## Memory

4GB Expandable with up to 10,000 measurements stored (B Version)

## Time History Data Rates (Global settings)

10ms, 62.5ms, 125ms, 250ms, 1/2 sec, 1 sec, 2 sec (User selectable)

## VoiceTag Audio Recording (B Versions)

30 seconds of audio recording with each measurement

## Size

283mm x 65mm x 30mm

## Weight

300gms/10oz

## Batteries

4 x AA Alkaline

## Battery life

Typically 12 hours with Alkaline AA  
Typically 20 hours with Lithium AA Non-Rechargeable

Battery life is dependent upon the battery type and quality & screen brightness

## External Power

5v via USB Socket from PC or Power Supply  
5v-15v via MultiIO socket

## Tripod Mount

1/4" Whitworth socket

## Connections

USB Type B to PC  
Multi-pin IO for external power  
AC Output via 3.5mm Jack Socket & ZL:826 Cable  
DC Output via Multi-IO Socket & ZL:825 Cable

## Case

Material: High Impact ABS-PC with soft touch back & keypad

## Environmental

Temperature Operating -10°C to +50°C  
Storage -20°C to +60°C  
Humidity Up to 95% RH Non Condensing

## Electromagnetic performance

IEC 61672-1:2002 & IEC 61672-2:2003  
Except where modified by EN 61000-6-1:2007 & EN 61000-6-1:2007

## Language options

English, French, German, Spanish as standard  
Other language options may be available

## Software Support

NoiseTools Download, Configuration & Analysis software supplied as standard. Compatible with Microsoft Windows XP, Vista & 7 (32bit & 64bit)

NoiseTools is supplied free from any licensing or installation restrictions.

## Measurement Functions

### CR:152A & CR:151A

Displayed Functions  
 $L_{xy}$ ,  $L_{XYMax}$ ,  $L_{XYMin}$   
Measurement Run Time

### CR:152B & CR:151B

Displayed Functions  
 $L_{xy}$ ,  $L_{XYMax}$ ,  $L_{XYMin}$   
Measurement Run Time

## Stored Functions

$L_{XYMax}$  & Time History of  $L_{XYMax}$

where x=A, C, Z; y= F, S, I

All values, figures and performance statements are typical and are subject to change without notice.

## Notes

1. For details of the displayed and stored parameters, please refer to the optimum user manual for full specifications.

All specifications, features and values are typical and are subject to change without notice.

# Instrument Selection

Function	Class 1	Class 2	Sound Level Functions	Data Logging	VoiceTag Recording	Software Support	Measurement Kit
Instrument							
CR:152A		Yes	Yes				CK:152A
CR:151A	Yes		Yes				CK:151A
CR:152B		Yes	Yes	Yes	Yes	Yes	CK:152B
CR:151B	Yes		Yes	Yes	Yes	Yes	CK:151B

## Standard Accessories

The **optimus** sound level meters are supplied, as standard, with the following accessories:  
User Manual  
Certificate of Calibration  
USB Data/Power Cable  
Windshield  
NoiseTools Software CD (Requires B Version to download measurements)

## Measurement Kits

The **optimus** sound level meters are available as a complete measurement kit with the following accessories:  
optimus Sound Level Meter  
CR:514 Class 2 or CR:515 Class 1 Acoustic Calibrator  
UA:237 90mm Windshield  
CK:280 Carrying Case  
User Manual & Certificates of Calibration  
USB Data/Power Cable & NoiseTools Software CD (Requires B Version to download measurements)



Acoustic House  
Bridlington Road  
Hunmanby  
North Yorkshire  
YO14 0PH  
United Kingdom

T: 0845 230 2434  
T: +44 1723 891655  
F: +44 1723 891742  
E: sales@cirrusresearch.co.uk  
W: www.cirrusresearch.co.uk

